



# ***Flight Testing of a Low-Cost De-orbiting Device for Small Satellites***

Presented at 2015 CubeSat Workshop  
Logan, UT  
August 8-9, 2015


*Presenter: Dana Turse*  
*Co-authors: Mark Reavis, Phil Keller, Chris Koehler (COSGC)*



# Orbital Debris Problem

---


- **>21,000 objects larger than 10cm being tracked by U.S. Space Surveillance Network**
- **NASA Specification NASA-STD-8719.14**
  - **All new satellites must have known re-entry plan**
  - **25 years until atmospheric reentry**

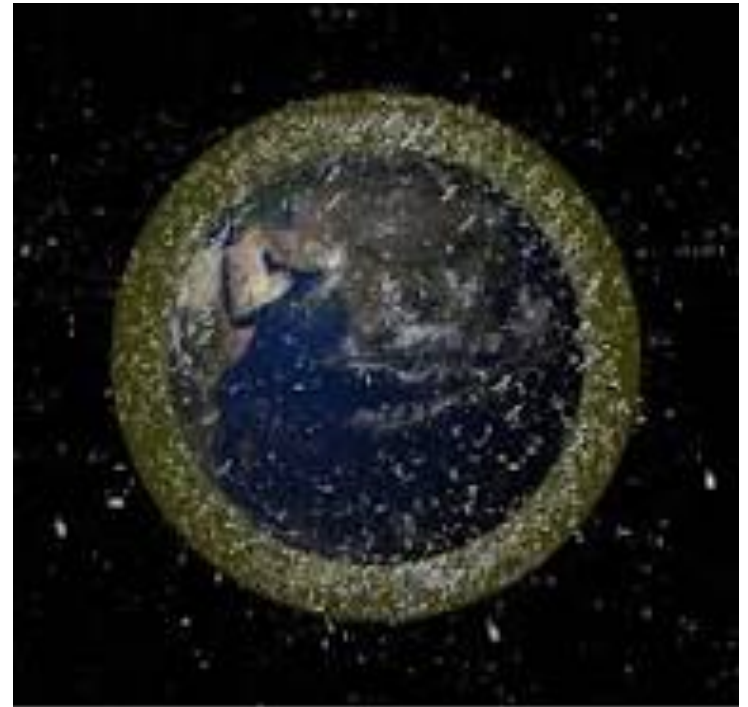




# RODEO


## Roll-Out DE-Orbiting devices

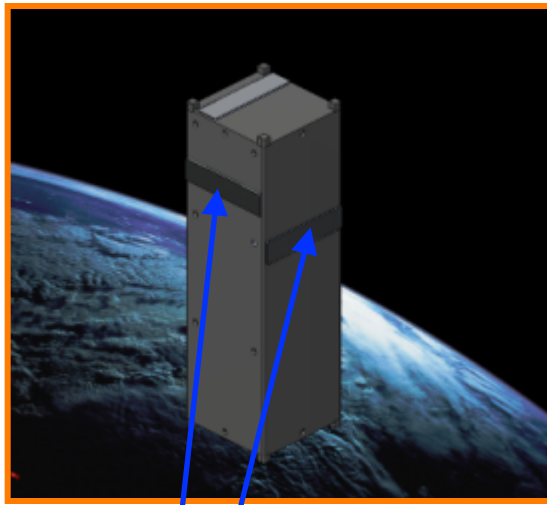


**Stowed RODEO Modules**

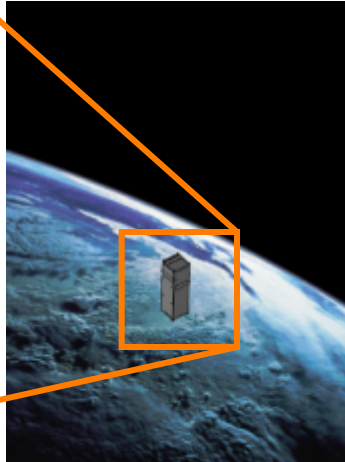

**Stowed**

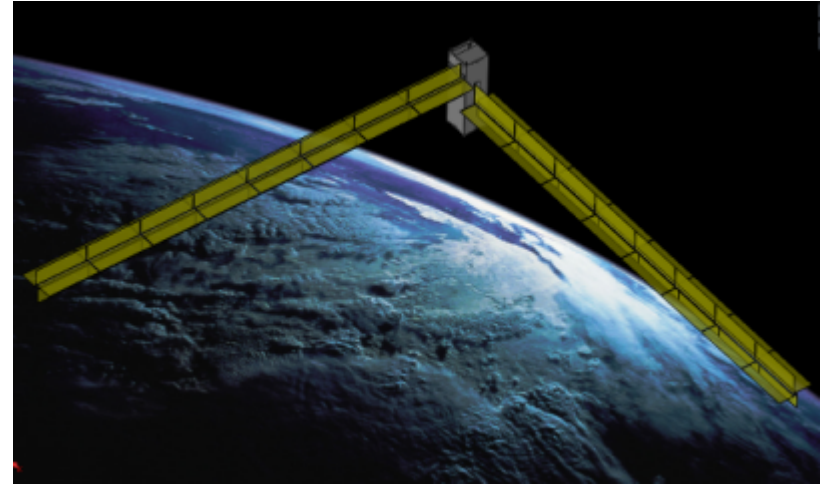

**Deployed**

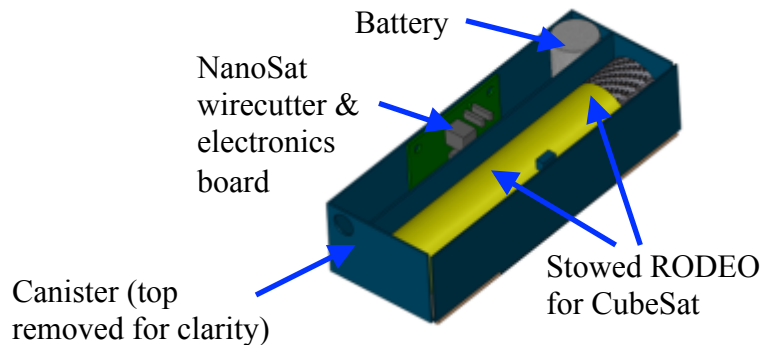

### Key Technology is Rolled Composite Boom

- Multifunctional
- High Specific Stiffness
- Simple & Reliable; few moving parts



# Concept of Operations

---




- **Inside the RODEO™ housing is a very simple electronic circuit board and battery. The board only has two inputs and a ground wire.**
  - **The first input is to initiate a commanded release by supplying spacecraft voltage.**
  - **The second input supplies a very small trickle charge to the battery and resets a timer circuit so that RODEO™ will remain stowed. However, if the spacecraft loses functionality and stops supplying the trickle charge, the timer circuit initiates and begins counting. After a pre-determined period of time with no trickle charge supplied, the timer circuit executes an automatic command to deploy the RODEO™ drag sail.**
- **Once the command to deploy is sent (either manually or via the timer circuit) an internal hot wire will release the spring-loaded hinged door, and the RODEO™ de-orbit wing will deploy.**
  - **Deployment occurs via the single-degree of freedom composite roll-out boom that is restrained by the hinged door of the RODEO™ canister.**



# Scale-able & Modular Deployable Booms




**CTD has developed a family of boom configurations that can meet most mission needs**

- **Size**
  - 0.25" to 10" diameter
  - Up to 75ft (22m) in length
- **Architecture**
  - Open, overlapped, Slit-lock, zipper
- **Deployment method**
  - SMP, motorized, strain energy driven

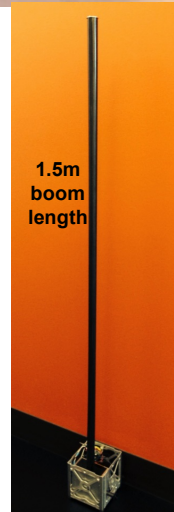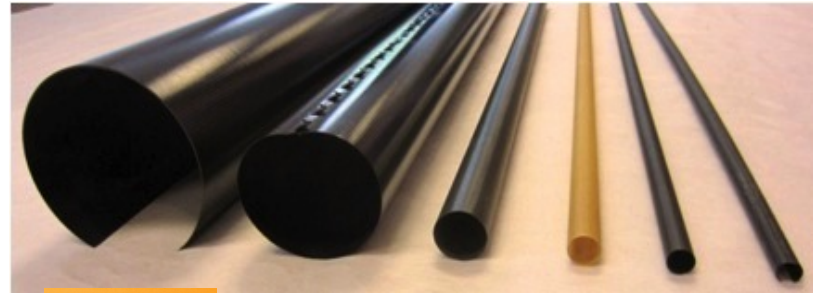



# Sizing Analysis Summary

System	Satellite Mass (kg)	RODEO Area*	
		25 years	5 years
3U CubeSat 	6.00	0.150 m <sup>2</sup>	1.16 m <sup>2</sup>
Nanosatellite 	15.0	0.526 m <sup>2</sup>	3.23 m <sup>2</sup>
ESPA-Class Small Satellite 	100	3.74 m <sup>2</sup>	27.85 m <sup>2</sup>

\*Assumed no other deployables; Random tumbling; Orbital Eccentricity = 0; Orbital Inclination 27 deg.



# RODEO Mass & Volume

---


Satellite	RODEO Performance Metrics	
	Stowed Volume	System Mass
3U CubeSat (6kg)	140 cm <sup>3</sup>	96 g
Nanosatellite (15kg)	175 cm <sup>3</sup>	131 g
Small Satellite (100kg)	270 cm <sup>3</sup>	472 g





# RocketSat-8 Flight Experiment

- Eighth RocketSat student project at the Colorado Space Grant Consortium (COSGC) since the program began in 2006
- Sub-orbital rocket launched out Wallops Flight Facility in August 2012
- Launch achieved 180 seconds of stable microgravity at an altitude of approximately 160 km

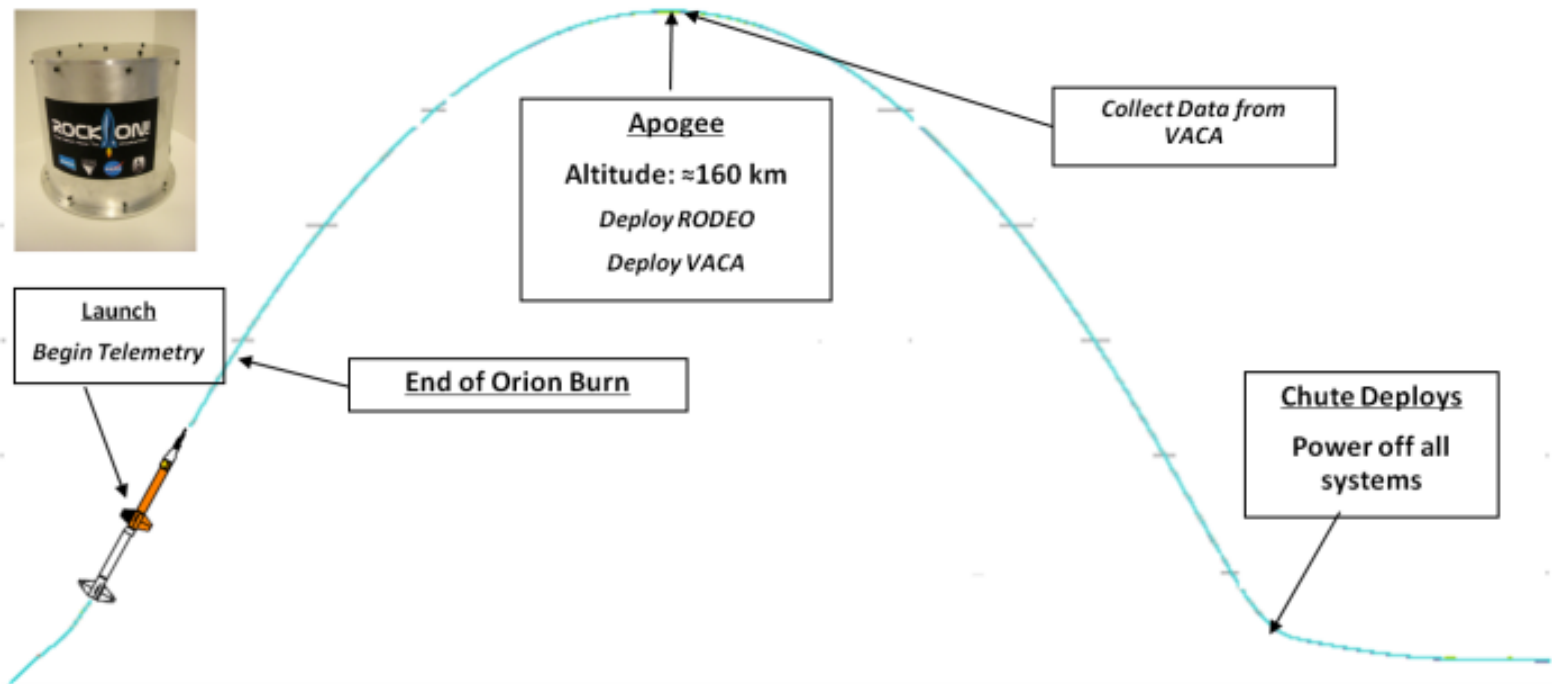






# Flight Configuration

- Flight configuration provides  $0.15\text{m}^2$ 
  - Sufficient area to de-orbit a 3U CubeSat in 25 years
- Three wings  $120^\circ$  apart provide area in multiple planes
- Wings wrapped around to one side of boom for stowage

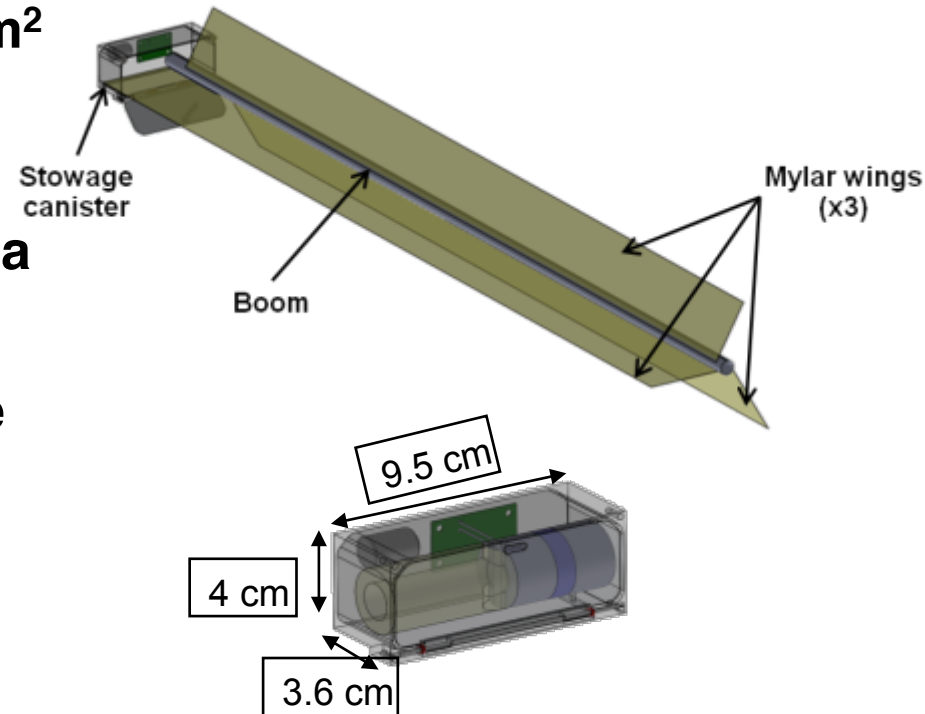



# Deployment Video


---





# Flight Test


---

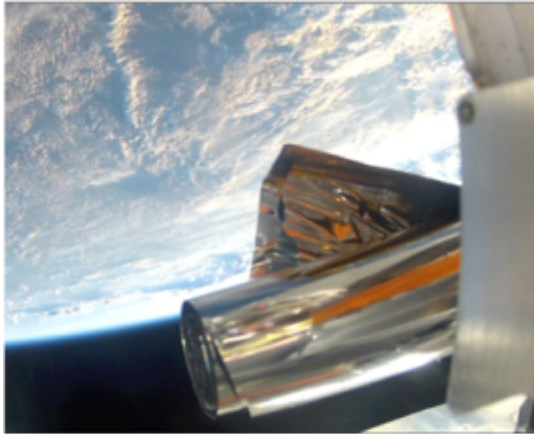

Beginning of  
Deployment



Mid-Deployment

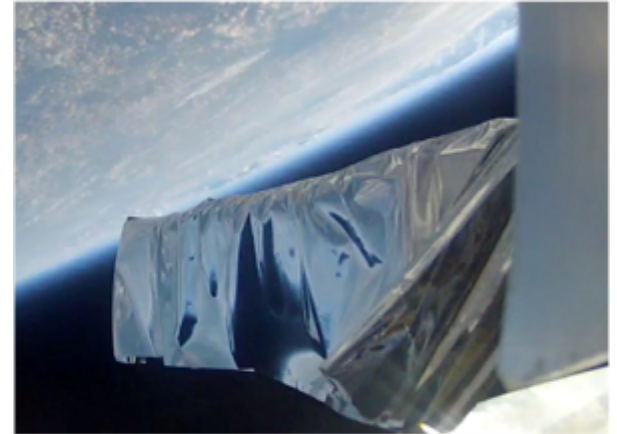

Fully Deployed

- **Full deployment achieved**
- **Deployment was off-nominal**
  - **Moisture absorption due to extended exposure (a few weeks) to extremely high humidity prior to launch**
  - **Would not be an issue for orbital flight**



# Recent Improvements


---

- **Alternative polymer matrix used in composite boom**
  - Higher glass transition temperature
  - Low moisture absorption and reduction of moisture-induced effects
- **Incorporation of Slit-Lock™ for improved stiffness and stability**
- **Root-rolled instead of tip-rolled boom design**
  - Both motor-driven and strain-energy driven designs demonstrated




# Slit-Lock™

- Results in a closed cross-section that improves performance
- Significantly increases bending & torsional stiffness/stability
- Edge features interlock upon deployment and remain engaged over all temperature ranges & loading cases
- Design provides a positive closing force at seam during the entire deployment
- Notches are “keyed” in the deployment mechanism to prevent “blooming”, provides precise rate control and enables high axial loads to be driven into boom

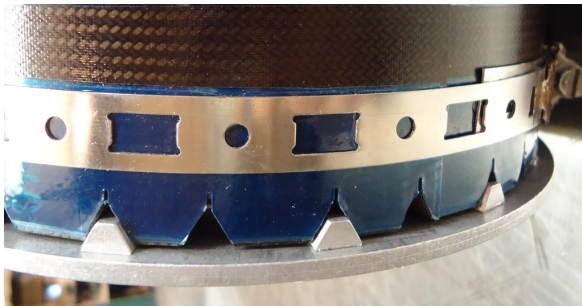

US Patent #8,863,369


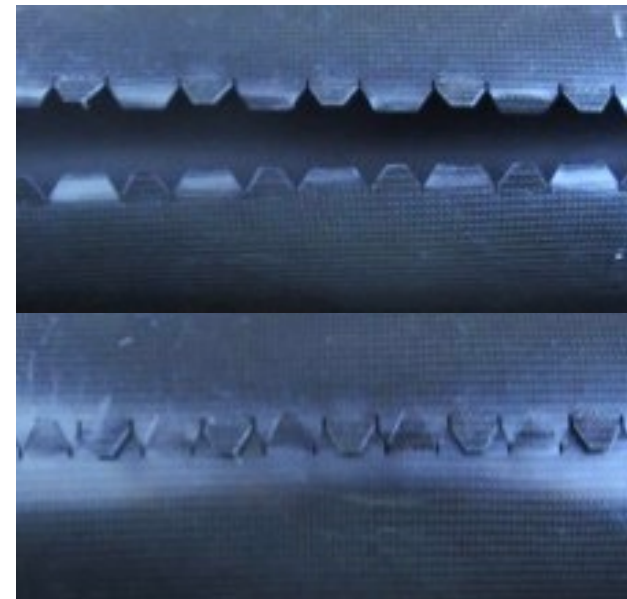






# Prototype Hardware

- **Prototype has been fabricated**
  - 0.5" diameter, 1.5m long
  - Incorporates Slit-lock
  - Motor driven
  - 175g, 3" x 2.5" x 1.5" envelope
- **Technology can be used for a wide range of applications**
  - Deployment actuator and structure for solar array, solar sail, drag sail, etc.
  - Gravity gradient boom
  - Instrument boom
  - Etc.

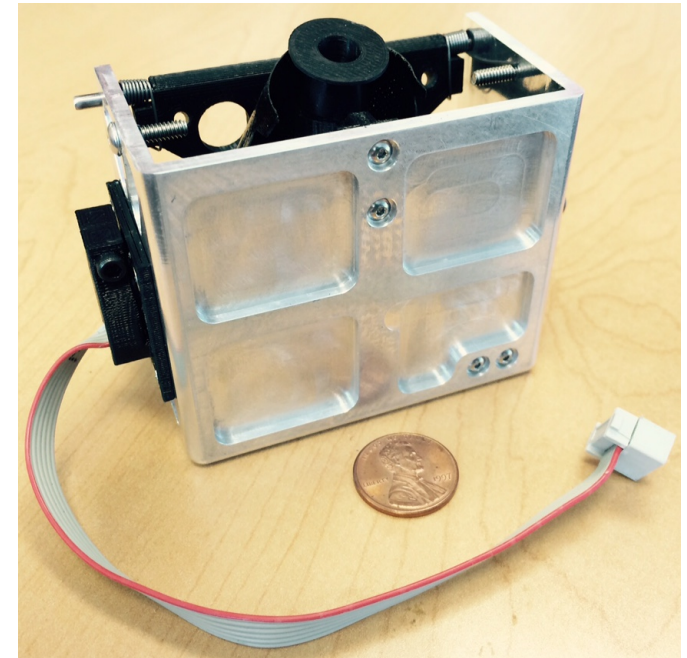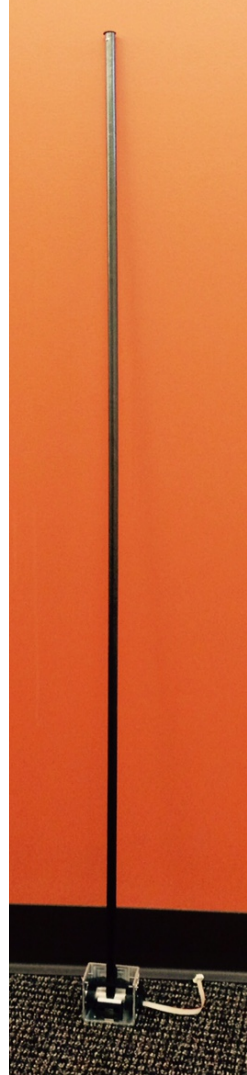



# Conclusions

---

- **Most responsible and pro-active way to mitigate orbital debris is to incorporate a de-orbiting device**
- **RODEO leverages lightweight, morphing composite structures to enable a low cost, proven, de-orbit solution**
- **RODEO deployed successfully from a sounding rocket as part of the Rocket-Sat X flight experiment**
  - **Off-nominal deployment caused by moisture saturation, would not be an issue for orbital flight**
- **Deployable boom technology is being improved upon and can be used for a wide range of applications**
- **Please come by CTD's booth (#50) at SmallSat conference to see some cool hardware!**